




Huge-solar

Radiance Series


M166H672-425-460W

425-460W Mono

High power, high efficiency and low BOS & LCOE, PERC+ cell technology, combines nondestructive cutting 166mm silicon wafer, and gapless ribbon connection technology, the modules can offer higher output with improved module efficiency. Half Cell design ensures less shading effect and lower resistive loss, lower risk of hot spot, as well as more reliable and stable power generation.

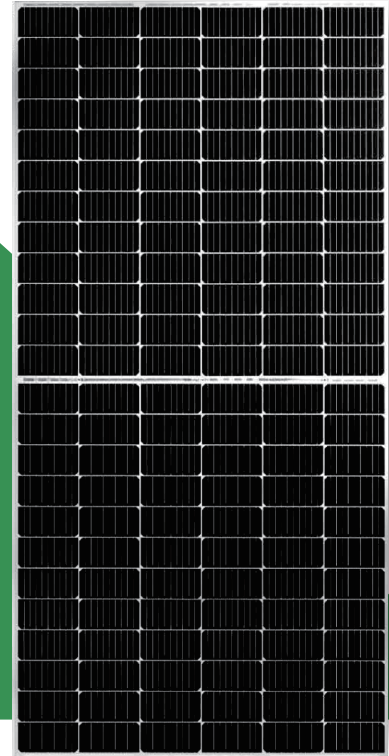

Linear performance Warranty

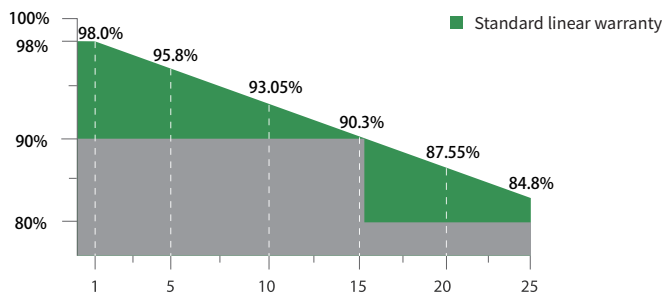

Linear performance warranty



Product warranty

Comprehensive Certificates

CERTIFICATION

- IEC61215/IEC61730
- ISO9001:Quality Management System
- ISO14001:Environmental Management System
- ISO45001:Occupational Health and Safety Management System



QIDONG SHENYA INDUSTRY CO., LTD

TEL: +86 15250188350 E-mail: paul@huge-solar.com
ADD: No.249 GongYuan Road,Qidong Jiangsu China


Electrical Specificatio																	
Module Type	M166H672-425W		M166H672-430W		M166H672-435W		M166H672-440W		M166H672-445W		M166H672-450W		M166H672-455W		M166H672-460W		
Test Standards	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	
Maximum Power	P _{max} (W)	425	315.5	430	319.1	435	322.7	440	326.0	445	329.7	450	333.4	455	337.2	460	340.9
Maximum Power Voltage	V _{mp} (V)	40.35	37.3	40.70	37.5	41.05	37.7	41.40	37.9	41.75	38.1	42.10	38.3	42.45	38.5	42.80	38.7
Maximum Power Current	I _{mp} (A)	10.54	8.46	10.57	8.51	10.60	8.56	10.63	8.61	10.66	8.66	10.69	8.71	10.72	8.76	10.75	8.81
Open Circuit Voltage	V _{oc} (V)	48.35	45.70	48.65	45.90	48.95	46.10	49.25	46.30	49.55	46.50	49.84	46.70	50.13	46.90	50.42	47.10
Short Circuit Current	I _{sc} (A)	11.05	8.92	11.08	8.99	11.11	9.06	11.14	9.13	11.17	9.20	11.20	9.26	11.23	9.32	11.26	9.38
Module Efficiency	(%)	19.55		19.78		20.01		20.24		20.47		20.70		20.93		21.16	
Power Output Tolerance	(W)	0±5															
Tolerance During Power Test	(%)	±3															

*(STC)*irradiance 1000W/m², Module Temperature 25 C, Air Mass 1.5
 *(NOCT)*irradiance 800W/m², Ambient Temperature 20 C, Wind Speed 1m/s

Mechanical Data	
Number of Cells	144Cells(6×24)
Dimensions of Module L*W*H (mm)	2094×1038×35mm
Weight (kg)	23kg
Glass	High transparency solar glass 3.2mm
Frame	anodized aluminium alloy
J-BOX	IP68, 3 diodes
Cable	4.0mm ² , 300mm or customized
Wind/Snow Load	2400Pa/5400Pa*
Connector	MC Compatible
Maximum power two-sided ratio	70±5%
*For more details please check the installation manual	

Temperature Ratings	
Temperature Coefficient of P _{max}	-0.39%/ C
Nominal Operating Cell Temperature(NOCT)	44±2 C
Temperature Coefficient of I _{sc}	+0.06%/ C
Temperature Coefficient of V _{oc}	-0.30%/ C
Maximum Ratings	
Operational Temperature	-40 - +85 C
Maximum System Voltage	1500V DC
Max Series Fuse Rating	20A
Packaging Configuration	
Module per box	31+31+5=67pieces
Module per 40'container	737pieces(35Frame)

ENGINEERING DRAWINGS

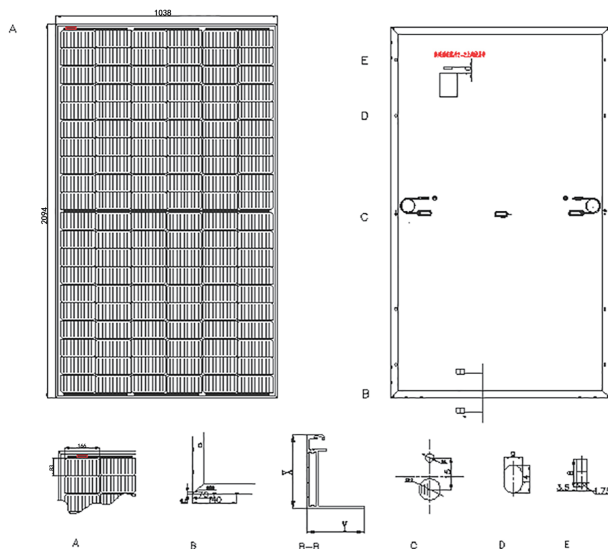

IV CURVES

